


## AK-HRP200G

Power supply	DC12 V
Power consumption	4.2 W
Weight	Approx. 1.3 kg (Approx. 2.87 lb)
Dimensions (W x H x D)	92 mm x 308 mm x 55 mm (3-5/8 inches x 12-1/8 inches x 2-3/16 inches) [excluding protrusions]

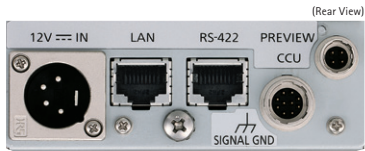

\* There is a possibility of requiring software update. For details, see "Support & Download" on the Panasonic website (<http://pro-av.panasonic.net/en/>).

## Compact operation panel also compatible with Studio Handy Cameras

- **Remote Operation:** The camera can be remotely operated via serial control or IP control. In addition to the AK-HC3800\*<sup>1</sup> Studio Handy Camera, it is also possible for Panasonic Multi-purpose Cameras, HD Convertible Cameras, and 4K/HD Integrated Cameras.
- **Compact 6U Size:** The unit is compact, with a width of 92 mm and a 6U height suitable for easy rack mounting.
- **ROP Menu/Camera Menu Setting:** The menu can be displayed on a monitor connected to the Camera Control Unit, so detailed camera settings can be made by operating the Remote Operation Panel.
- **Joystick Control Lever:** The joystick control lever enables fine manual iris/pedestal adjustment.
- **SD Memory Card Slot:** Scene files, user files\*<sup>2</sup> and lens file\*<sup>2</sup> can be saved on to a SD memory card. SD memory cards can also be used for firmware upgrades.
- **IP Connection\*<sup>3</sup>:** A LAN terminal enables IP connection via Ethernet (RJ45 LAN cable).

\*1: When power is supplied from the Camera Control Unit. \*2: Only Studio Handy Camera can handle.

\*3: External power supply (DC 12 V) required when LAN cable is used.